

## RE-HAMMER CHIPPER - RCM



The machine is designed to reduce the chips of clean wood of various dimensions to uniform dimension chips.

### TECHNICAL FEATURES

- Very strong hammer rotor: statically and dynamically balanced – splined to the main shaft fitted with supports and bearings
- Transmission system and guards
- Very strong body fitted with: counter-hammer beam removable from outside – easily removable perforated screen – feeding hopper – top inspection hatch with safety limit switch – side inspection door
- Machine basement, electric motor and slide.

### BENEFITS

- Easy replacement of hammer, counter-hammer beam and perforated screen
- High efficiency • High reliability • Very low maintenance cost.

### BEST IN CLASS FOR:




WOOD BASED PANELS:  
MDF/HDF  
PB/SPB  
OSB/LSB/FOSB  
INSULATION BOARDS



PRESSED WOOD PACKAGING:  
PALLET BLOCKS



PELLETS & ENERGY:  
WOOD PELLETS AND  
BLACK PELLETS

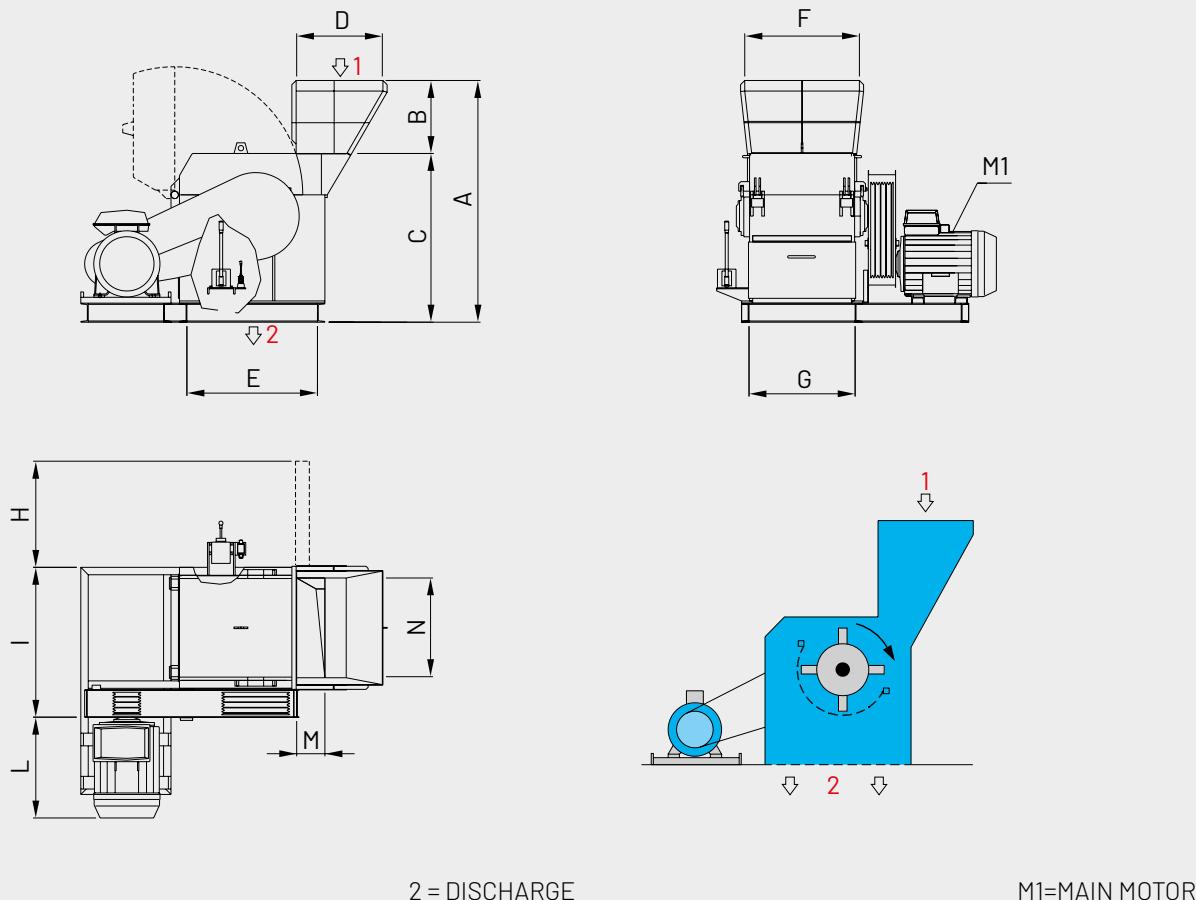

| MODEL                           | OVERALL DIMENSIONS mm |     |      |     |      |      |      |      |      |     |     |     |
|---------------------------------|-----------------------|-----|------|-----|------|------|------|------|------|-----|-----|-----|
|                                 | A                     | B   | C    | D   | E    | F    | G    | H    | I    | L*  | M   | N   |
| RE-HAMMER CHIPPER<br>RCM.850/75 | 2278                  | 688 | 1590 | 810 | 1230 | 1100 | 1000 | 1000 | 1405 | 895 | 250 | 930 |
| RE-HAMMER CHIPPER<br>RCM.850/90 | 2278                  | 688 | 1590 | 810 | 1230 | 1100 | 1000 | 1000 | 1405 | 900 | 250 | 930 |

\*Variable according to motor size

| MODEL                           | DRUM        |           |             | CAPACITY               |                           | INSTALLED POWER kW |  | WEIGHT APPROX. kg |
|---------------------------------|-------------|-----------|-------------|------------------------|---------------------------|--------------------|--|-------------------|
|                                 | DIAMETER mm | LENGTH mm | HAMMERS pes | BULK m <sup>3</sup> /h | t/h                       | M1**               |  |                   |
| RE-HAMMER CHIPPER<br>RCM.850/75 | 850         | 900       | 32          | 20-25                  | According to bulk density | 75                 |  | 5000              |
| RE-HAMMER CHIPPER<br>RCM.850/90 | 850         | 900       | 32          | 25-30                  |                           | 90                 |  | 5050              |

\*\*According to type of material