


CIRCULAR EXTRACTORS
EXTRAPLUS



BEST IN CLASS FOR:




WOOD BASED PANELS:

MDF/HDF

PB/SPB

OSB/LSB/FOSB

INSULATION BOARDS



PRESSED WOOD PACKAGING:





PALLET BLOCKS



PELLETS & ENERGY:

WOOD PELLETS AND
BLACK PELLETS

TECHNICAL FEATURES BENEFITS

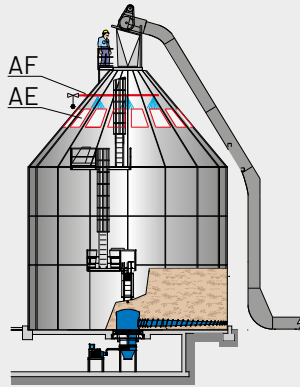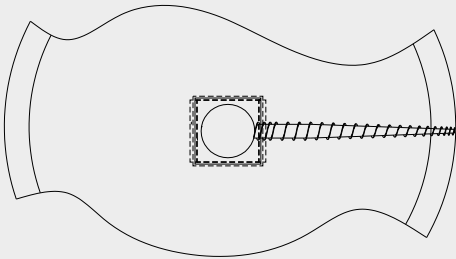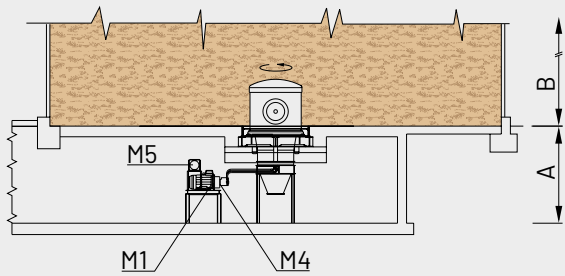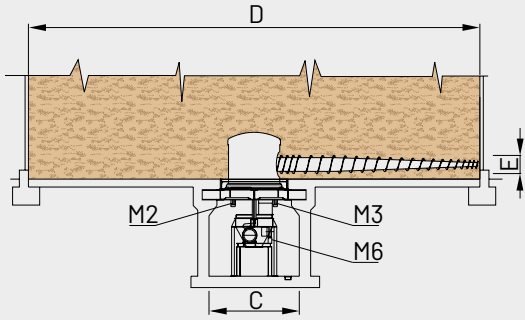

FOR DRY MATERIAL ONLY
AF = FIRE-EXTINGUISHING SYSTEM
AE = EXPLOSION VENTS

M1 = MAIN SCREW ROTATION
M2 = TURRET ROTATION
M3 = TURRET ROTATION

M4 = HEAT EXCHANGER
M5 = HEAT EXCHANGER FOR GEAR OIL
M6 = PUMP FOR GEAR OIL

MODEL	OVERALL DIMENSIONS mm					VOLUME OF SILO m³
	A	B - top	C	D	E	
EXTRAPLUS	min. 4500	up tp 30000	min. 4000	12000-27000	650-1200	2000-13000

MODEL	THROUGHPUT m³/h - top	INSTALLED POWER kW						WEIGHT APPROX. kg
		M1	M2	M3	M4	M5	M6	
EXTRAPLUS	max. 700	According to type of material and height of silo.						max. 22000