


DOSING BINS

LIVE BOTTOM PITS

FOR CHIPS, SAWDUST, SHAVINGS, WET & DRY PARTICLES

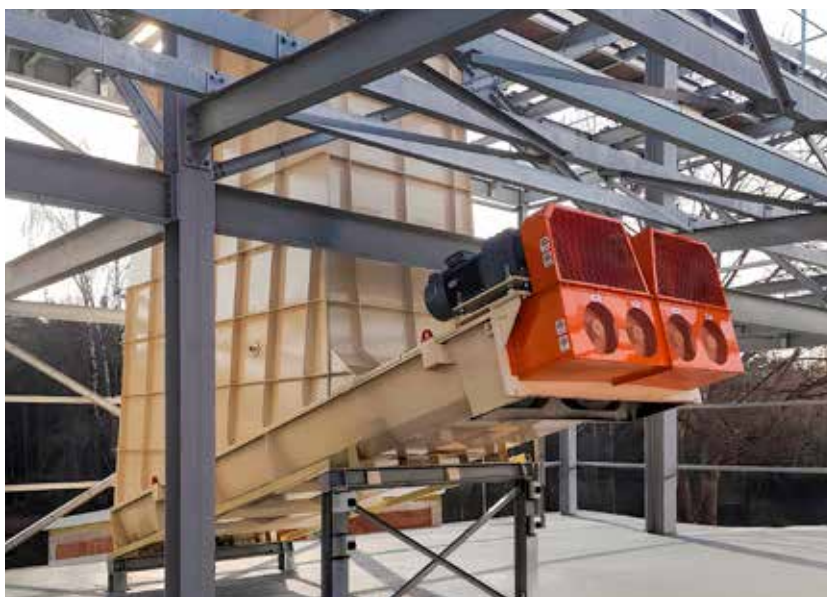

TECHNICAL FEATURES


- Versatile storage-dosing live bottom pits: DB.6-9-12 with open-top for feeding with front loader – DBC.4 closed execution for metering of chips – DBD.4 special application for metering of Driers – DB1.1 & 2.2 for simultaneous metering of two downstream
- Destorage system based on live bed made up of modules of two or three dosing screws (parallel or opposed construction)
- Separate drive for each series of dosing screws
- Level controls.

BENEFITS


Storage-dosing of fractioned materials, wet or dry, such as chips, sawdust, shavings, particles, etc.

- Accurate dosing of several downstream machines, e.g.: roll screens – cleaners or sifters for chips, sawdust and shavings – knife ring flakers – hammermills – driers – dry screens – dry mills
- No bridge formation
- No material demixing
- Wide range of extraction capacity: running the dosing screw modules separately, alternatively or all together – driving each motor with a frequency converter
- High dosing accuracy from progressive pitch screws
- High efficiency and reliability
- Low maintenance.

BEST IN CLASS FOR:




WOOD BASED PANELS:
MDF/HDF
PB/SPB
INSULATION BOARDS





PRESSED WOOD PACKAGING:
PALLET BLOCKS



PELLETS & ENERGY:
WOOD PELLETS AND
BLACK PELLETS
THERMAL AND
ELECTRIC ENERGY



WOOD RECYCLING AND
WASTE TREATMENT:
CUSTOMIZED SOLUTIONS
FOR RECYCLING

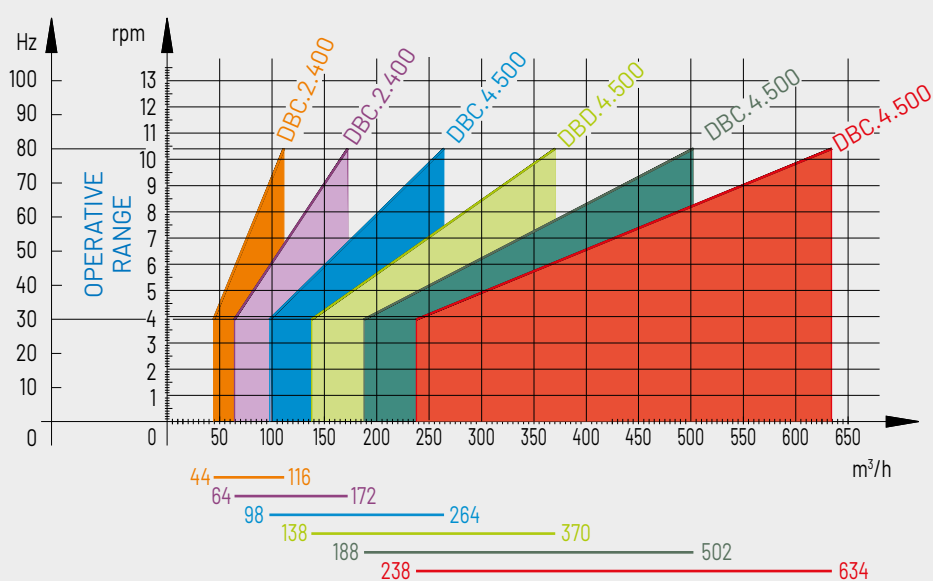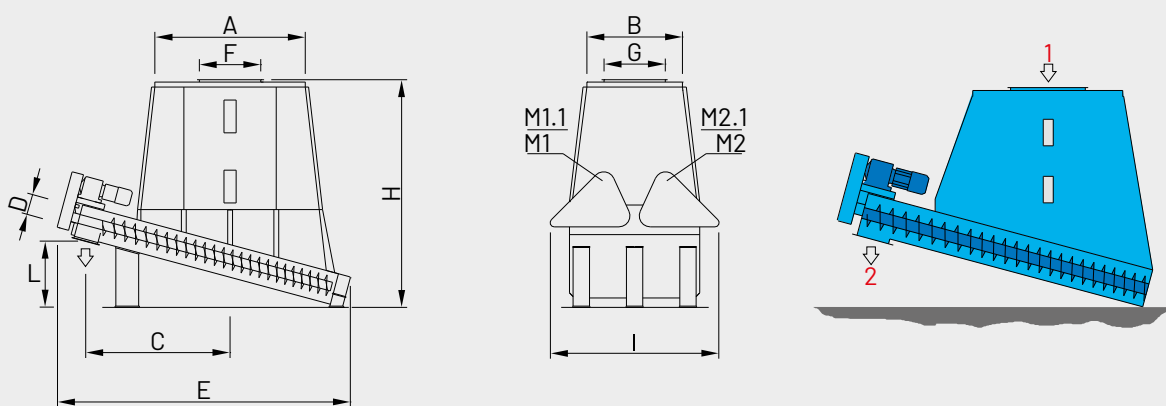

1 = FEEDING

2 = DISCHARGE

M1-M2 = SCREW ROTATION

M1.1-M2.1 = FAN FOR COOLING



LIVE BOTTOM PITS - CLOSED TOP

FOR CHIPS ONLY & SPECIAL APPLICATION TO METER THE DRYER FEEDING BY CONVEYORS

MODEL	BIN CONTENT m³	THROUGHPUT m³/h	OVERALL DIMENSIONS mm										INSTALLED POWER kW**				WEIGHT APPROX. kg
			A	B	C	D	E	F	G	H	I	L	M1	M1.1	M2	M2.1	
DBC.2.400	5	SEE DIAGRAM	2310	975	2420	400	4470	2230	800	3300	995	1005	9,2	0,18	-	-	4300
DBC.4.500	30	SEE DIAGRAM	3845	2506	3340	500	7180	1500	1500	5570	4140	1615	11	0,18	11	0,18	19000
DBD.4.500*	30	SEE DIAGRAM	3600	1600	3685	500	8260	1200	1400	5390	2400	1405	45	0,27	45	0,27	13000
DBC.4.500	50	SEE DIAGRAM	3845	2506	3340	500	7180	1500	1500	5570	4140	1615	18,5	0,18	18,5	0,18	19000
DBC.4.500	60	SEE DIAGRAM	3845	2506	3340	500	7180	1500	1500	6570	4140	1615	22	0,18	22	0,18	20000

*For dryer application

**According to type of material

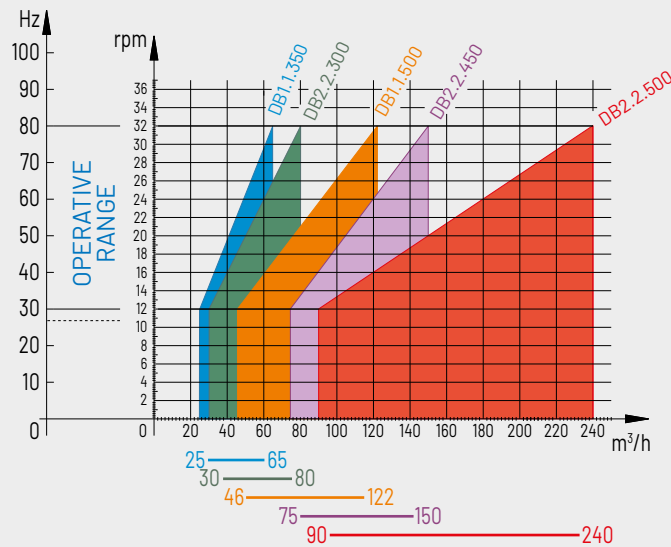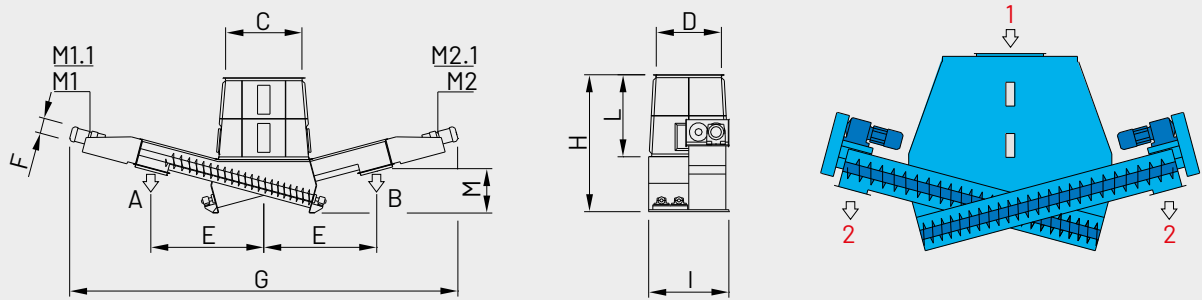

CAPACITY FOR EACH FLOW A AND B

1 = FEEDING 2 = DISCHARGE M1-M2 = SCREW ROTATION M1.1-M2.1 = FAN FOR COOLING



LIVE BOTTOM PITS - CLOSED TOP WITH TWO EXTRACTIONS

FOR CHIPS, SAWDUST, WET & DRY PARTICLES FEEDING BY CONVEYORS

MODEL	BIN CONTENT m³	THROUGHPUT m³/h		OVERALL DIMENSIONS mm								
		A	B	C	D	E	F	G	H	I	L	M
DB1.1.350	2	25 - 65	25 - 65	1400	700	2075	350	5296	2411	930	1500	632
DB1.1.500	3	46 - 122	46 - 122	2000	900	3000	500	7392	2500	1370	1000	1150
DB2.2.300	3	30 - 80	30 - 80	1400	1200	2075	315	7335	2480	1472	1500	820
DB2.2.450	8	75 - 150	75 - 150	1600	1600	2606	450	6480	3280	2080	2000	1005
DB2.2.500	8	90 - 240	90 - 240	2000	1500	3296	500	7965	3430	2326	2000	1225

MODEL	INSTALLED POWER kW				WEIGHT APPROX. kg
	M1	M1.1	M2	M2.1	
DB1.1.350	4,0	0,08	4,0	0,08	2500
	11,0	0,18	11,0	0,18	
DB1.1.500	9,2	0,18	9,2	0,18	4000
	5,5	0,08	5,5	0,08	
DB2.2.300	11	0,18	11	0,18	4000
DB2.2.450	9,2	0,18	9,2	0,18	6500
DB2.2.500	11,0	0,18	11,0	0,18	8000

Solutions for different throughputs, layout arrangements and type of material are available upon request.

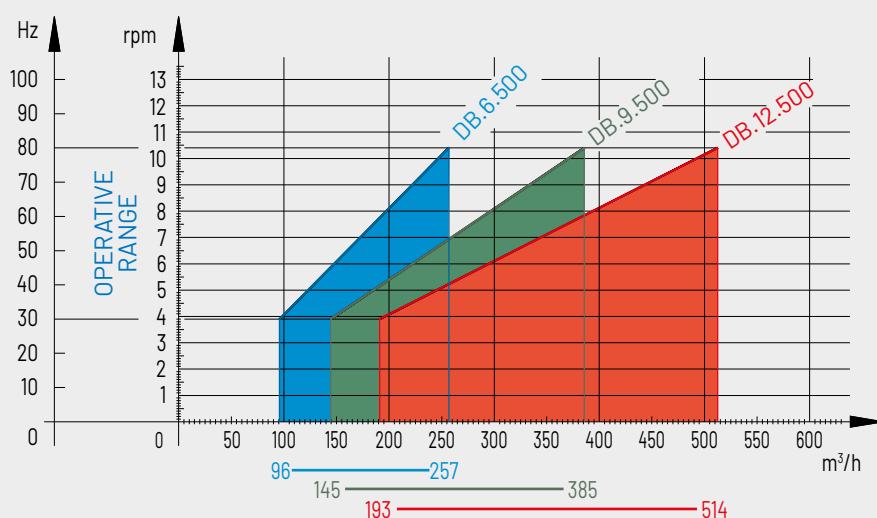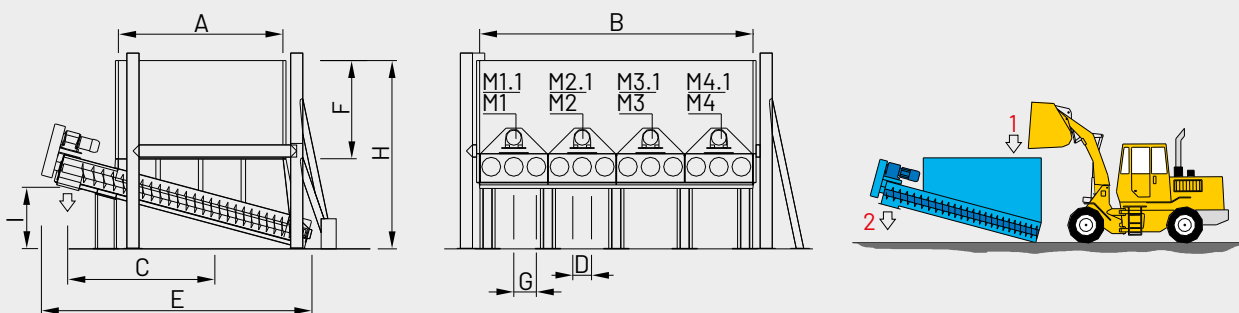

1 = FEEDING

2 = DISCHARGE

M1-M2-M3-M4 = SCREW ROTATION

M1.1-M2.1-M3.1-M4.1 = FAN FOR COOLING

LIVE BOTTOM PITS - OPEN TOP

FOR CHIPS, SAWDUST, SHAVINGS WET & DRY PARTICLES FEEDING BY FRONT LOADER

MODEL	BIN CON- TENT m³	THROUGH- PUT [30 - 80 Hz] m³/h	OVERALL DIMENSIONS mm									INSTALLED POWER kW								WEIGHT APPROX. kg
			A	B	C	D	E	F	G	H	I	M1	M1.1	M2	M2.1	M3	M3.1	M4	M4.1	
DB. 6.500	Chips 50	96-257	4372	4508	3719	500	7195	2608	750	5000	1540	11	0,18	11	0,18	-	-	-	-	19500
												15	0,07	15	0,07	-	-	-	-	
	Sawdust 40	96-257	4372	3632	3719	500	7195	2608	600	5000	1540	11	0,18	11	0,18	-	-	-	-	19500
												15	0,07	15	0,07	-	-	-	-	
DB. 9.500	Chips 75	145- 385	4372	6762	3719	500	7195	2608	750	5000	1540	11	0,18	11	0,18	11	0,18	-	-	28500
												15	0,07	15	0,07	15	0,07	-	-	
	Sawdust 60	145- 385	4372	5448	3719	500	7195	2608	600	5000	1540	11	0,18	11	0,18	11	0,18	-	-	28500
												15	0,07	15	0,07	15	0,07	-	-	
DB. 12.500	Chips 100	193 - 514	4372	9016	3719	500	7195	2608	750	5000	1540	11	0,18	11	0,18	11	0,18	11	0,18	37500
												15	0,07	15	0,07	15	0,07	15	0,07	
	Sawdust 80	193 - 514	4372	7264	3719	500	7195	2608	600	5000	1540	11	0,18	11	0,18	11	0,18	11	0,18	37500
												15	0,07	15	0,07	15	0,07	15	0,07	